

DRIVER AND EVENT DETAILS

Name
 Date
 Event
 Weather
 Result

TRACK CONDITIONS

Grip Level High Medium Low
 Type Tight Open Both
 Surface Carpet Tarmac Wood
 Condition Smooth Bumpy
 Temperature N/A°C °F
 Venue Indoor Outdoor

Mi4oxl

CHASSIS AND ELECTRICS

Chassis
 Top Deck
 Bodyshell
 Wing
 E.S.C
 Servo
 Receiver
 Cells
 Cell Position Backward Forward

MOTOR AND GEARING

Motor
 Rotor Diameter
 Timing
 Gear Pitch 48Dp 64Dp
 Spur Size
 Pinion Size

Transmission

Option 1 Option 2

WHEELS, TYRES AND INSERTS

Wheels
 Tyres
 Inserts
 Tyre Additive
 Additive Time 20MIN (R) 20MIN (F)
 Tyre Warmers Yes No

DRIVER NOTES

Narrow Front Hex U3570

FRONT SETTINGS

Drive Diff Spool One-Way Height High Low

Servo Saver Yes No Yoke Flex X M STD

Pivot Blocks Moulded (std) Alloy

Screw Block Spacers Front 2.5 mm Rear 2.5 mm

Wishbone Quik-Klips Front 2.5 mm Rear 1.5 mm

Toe In-Out In-board Out-board 1°

Ride Height (Chassis to Floor) 5.0 mm

Droop On 10mm Block Axle Height 5.5 mm

Anti-roll Bar No 1.20 1.40 1.60


Castor 0° 2° 4° 6°

Camber Positive Negative 2 Deg



Link Washers Under Ball Under Bracket 1.0 mm

Inboard Pin Kick-up Anti-dive Horizontal

Pivot Block Spacers Front N/A mm Rear N/A mm



Wishbone Flex CF M



Front Shocks


Oil 50 WT

Springs Spec R 2.8


Piston Holes 2 3

length 12.7

Rebound 25 %




Centre Track Rod

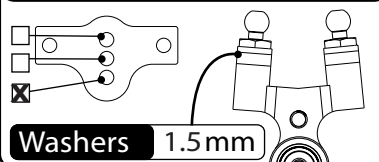

Washers 1.5mm

Link Mount

1 Groove - 45mm
 2 Groove - 42mm
 3 Groove - 39mm
 4 Groove - 37mm



REAR SETTINGS

Diff Ball Gear Oil 1000 Height High Low

Pivot Blocks Moulded (std) Alloy

Screw Block Spacers Front 1.0 mm Rear 1.0 mm

Wishbone Quik-Klips Front 2.0 mm Rear 2.0 mm

Toe In In-board 2.5° Out-board °

Ride Height (Chassis to Floor) 5.2 mm

Droop On 10mm Block Axle Height 5.0 mm


Anti-roll Bar No 1.20 1.40 1.60

Camber Positive Negative 2 Deg


Link Washers Under Ball Under Bracket 0.5 mm

Inboard Pin Pro-Squat Anti-Squat Horizontal

Pivot Block Spacers Front N/A mm Rear N/A mm




Wishbone Flex CF M



Link Mount


1 Groove - 45mm
 2 Groove - 42mm
 3 Groove - 39mm
 4 Groove - 37mm



Qwik Clips

Front 1.0 mm

Rear 0.0 mm



Rear Shocks

Oil 50 WT

Springs Spec R 2.7

Piston Holes 2 3

length 12.7

Rebound 25 %